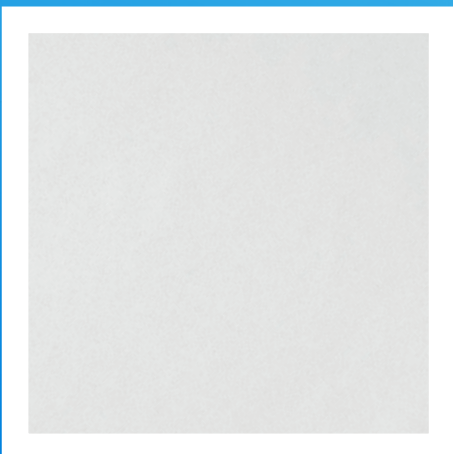































AMF TOPIQ® Prime

- AMF TOPIQ® Prime is a very light stone wool panel with a modern, smooth surface.
- Excellent sound absorption ($0.95 \alpha_w$)
- Excellent light reflectance (88%)
- ISO 5
- Ideal for offices, retail, classrooms, learning applications and underground garages



Edge details Additional edge details on request	 Board 	Tegular 24/90 	Tegular 15/90 														
Thickness (mm)	 15	15	15														
Dimensions (mm) Additional sizes on request	 600 x 600 625 x 625 1200 x 600 1250 x 625	600 x 600 625 x 625 1200 x 600	600 x 600 625 x 625 1200 x 600														
System	 Exposed demountable - System C																
Weight	 2.1 kg / m ²																
Colour	 White																
Sound absorption	 EN ISO 354 $\alpha_w = \mathbf{0.95}$ as per EN ISO 11654 - Class A <table border="1" data-bbox="459 882 1452 949"> <thead> <tr> <th>Frequency f (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>α_p</td> <td>0.50</td> <td>0.85</td> <td>0.95</td> <td>0.90</td> <td>1.00</td> <td>1.00</td> </tr> </tbody> </table> NRC = 0.90 as per ASTM C 423			Frequency f (Hz)	125	250	500	1000	2000	4000	α_p	0.50	0.85	0.95	0.90	1.00	1.00
Frequency f (Hz)	125	250	500	1000	2000	4000											
α_p	0.50	0.85	0.95	0.90	1.00	1.00											
Sound attenuation	 EN ISO 10848-2 $D_{n,f,w} = \mathbf{24\ dB}$ as per EN ISO 717-1 CAC = 24 dB as per ASTM E 413-10																
Sound reduction	 EN ISO 10140-2 $R_w = \mathbf{13\ dB}$ as per EN ISO 717-1																
Fire reaction	 Euroclass A1 as per EN 13501-1 Class A as per ASTM E 84 RUS KM2 (G1, V1, D1, T1) as per 123-FZ																
Light reflectance	 88%																
Humidity resistance	 100% RH																
Clean room	 ISO 5 as per EN ISO 14644-1																
Indoor air quality	    A E1 IAC																
Cleanability	  																
Sustainability	    EN ISO 14021 EC 1272/2008 Annex G M1 www.blauer-engel.de/uz132																

Products may vary from country to country. Please contact your local sales representative. For further information and legal notice, please visit our website.